



TT20

ENCLOSED & OPEN TOP

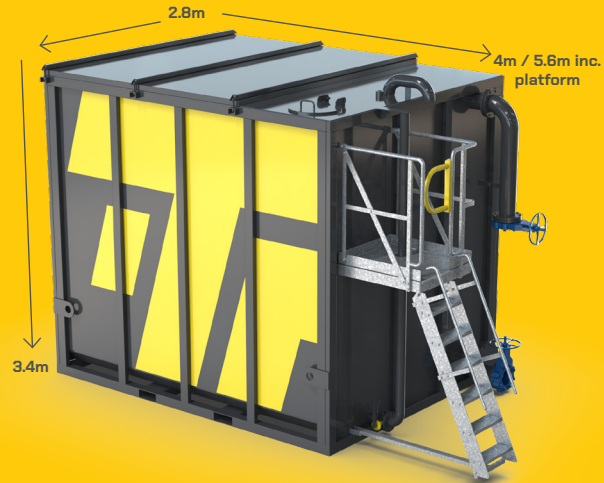

MEASUREMENTS & WEIGHT

Volume	20,000 Litre 20m ³ 4,400 Gallons (UK)
Height	3,400mm
Width	2,800mm
Length	5,600mm including rigged platform
Weight	3500kg (approx.) empty

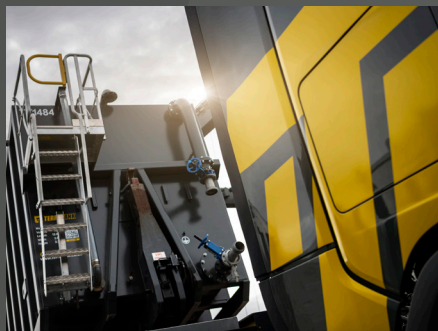

MOBILISATION


Hiab or forklift offload

Liftable by crane using low level lifting points

APPLICATIONS

HP jetting	Chemical decom	Shutdowns & turnarounds
Pipeline testing	Industrial services	Environmental incidents

TECHNICAL

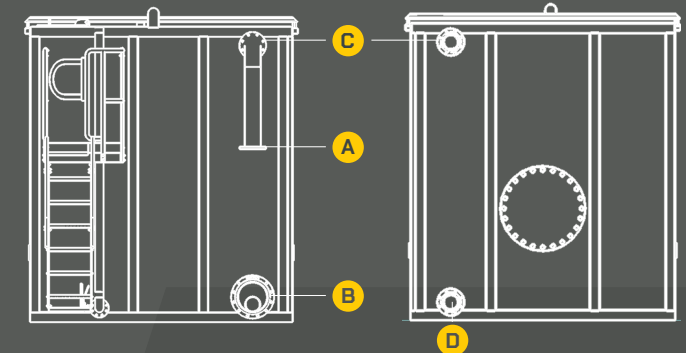

	Front	Rear
Connections	<p>A Fill Pipe up to 6 inch (150mm) + valve + coupling</p> <p>B Discharge up to 12 inch (300mm) + valve + couplings</p> <p>C High level 6 inch (150mm) additional connections Valve + Coupling connection tailored to requirement</p>	<p>Fill Pipe up to 6 inch (150mm) + valve + coupling</p> <p>D Discharge up to 6 inch (150mm) + valve + couplings</p> <p>High level 6 inch (150mm) additional connections Valve + Coupling connection tailored to requirement</p>
Contents Gauging	Sight tube/Calibrated float gauge/Radar (Telemetric)	
Manway Access	Low level 'easy step-through' hinged manlid	
Top Access Platform	Integral access platform c/w steps, handrails, safety swing gate	
Internal Coating	Chemical resistant epoxy lining (customer to supply MSDS for tank contents compatibility checking)	