


**TT30**

**ENCLOSED  
& OPEN TOP**

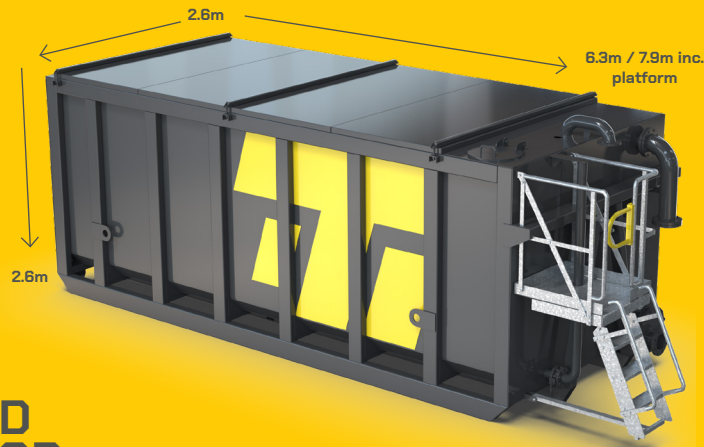

#### MEASUREMENTS & WEIGHT

Volume	30,000 Litre 30m <sup>3</sup> 6,600 Gallons (UK)
Height	2,600mm
Width	2,600mm
Length	7,900mm including rigged platform
Weight	5300kg (approx.) empty



#### MOBILISATION

Hiab or forklift offload


Liftable by crane using low level lifting points

Self-offload by Roll-On-Off

#### APPLICATIONS

HP jetting	Chemical decom	Shutdowns & turnarounds
Pipeline testing	Industrial services	Environmental incidents

#### TECHNICAL

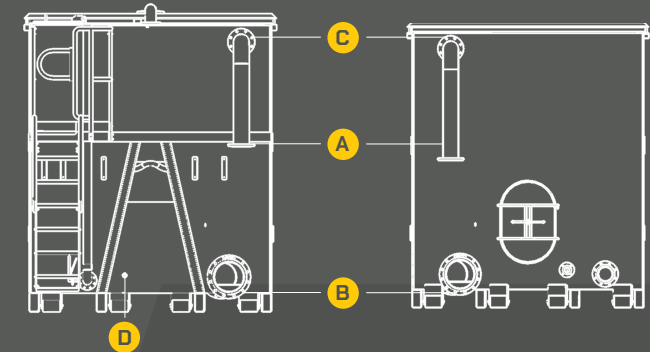

	Front	Rear
<b>Connections</b>	<p><b>A</b> Fill Pipe up to 6 inch (150mm) + valve + coupling</p> <p><b>B</b> Discharge up to 12 inch (300mm) + valve + couplings</p> <p><b>C</b> High level 6 inch (150mm) additional connections Valve + Coupling connection tailored to requirement</p> <p><b>D</b> Sampling take off point 1 inch (25mm)</p>	<p>Fill Pipe up to 6 inch (150mm) + valve + coupling</p> <p>Discharge up to 12 inch (150mm) + valve + couplings</p> <p>High level 6 inch (150mm) additional connections Valve + Coupling connection tailored to requirement</p> <p>Sampling take off point 1 inch (25mm)</p>
<b>Contents Gauging</b>	Sight tube/Calibrated float gauge/Radar (Telemetric)	
<b>Manway Access</b>	Low level 'easy step-through' hinged manlid	
<b>Top Access Platform</b>	Integral access platform c/w steps, handrails, safety swing gate	
<b>Internal Coating</b>	Chemical resistant epoxy lining (customer to supply MSDS for tank contents compatibility checking)	