

TT40

MIXER TANK



MEASUREMENTS & WEIGHT

Volume	40,000 Litre 40m ³ 8,800 Gallons (UK)
Height	3,260mm
Width	2,600mm
Length	7,900mm including rigged platform
Weight	6300kg (approx.) empty




MOBILISATION

- Hiab or forklift offload
- Liftable by crane using low level lifting points
- Self-offload by Roll-On-Off

APPLICATIONS

Manufacturing	Chemical decom	Contract de-watering
Effluent processing	Industrial services	Waste water treatment

TECHNICAL

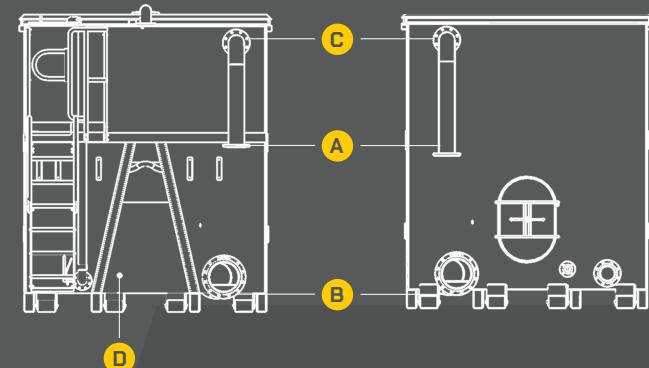

	Front	Rear
Connections	<ul style="list-style-type: none"> A Fill Pipe up to 6 inch (150mm) + valve + coupling B Discharge up to 12 inch (300mm) + valve + couplings C High level 6 inch (150mm) additional connections D Valve + Coupling connection tailored to requirement D Sampling take off point 1 inch (25mm) D Top jetting ports 6 inch (150mm) 	<ul style="list-style-type: none"> A Fill Pipe up to 6 inch (150mm) + valve + coupling B Discharge up to 6 inch (150mm) + valve + couplings C High level 6 inch (150mm) additional connections D Valve + Coupling connection tailored to requirement D Sampling take off point 1 inch (25mm) D Top jetting ports 6 inch (150mm)
Mixers	2nr 4kw 71 rpm mixers	
Required Power Supply	5 pin plug, 3 phase 32 Amp 14.8 Amp FLC (approx.)	
Contents Gauging	Sight tube/Calibrated float gauge/Radar (Telemetric)	
Vent	Vented (on closed roof versions)	
Manway Access	Low level 'easy step-through' hinged manlid	
Top Access Platform	Integral access platform c/w steps, handrails, safety swing gate	
Internal Coating	Chemical resistant epoxy lining (customer to supply MSDS for tank contents compatibility checking)	