

TT10 CENTRATE TANK WITH INTEGRATED PUMP



MEASUREMENTS & WEIGHT

| | | | |
|-----------------|------------------------------------------------|-----------------|-------------------------------------------------|
| Length | 3,700mm | Volume | 10,000 Litres |
| Width | 2,600mm | | 10m ³ |
| Height | 1,500mm | | 2,200 UK Gallons |
| Weight (empty) | 2500kg (approx.) | Weight (loaded) | 13700kg (approx.) - based on a liquid of SG1.12 |
| Ground Pressure | 59 kPa (approx.) - based on a liquid of SG1.12 | | |

MOBILISATION

| |
|------------------------------------------------------|
| Hiab self-offload |
| Crane lift via easy access, low level lifting points |


APPLICATIONS

| | |
|------------------|---------------------|
| HP jetting | Industrial services |
| Pipeline testing | Site buffer storage |
| Chemical decom | Centrate storage |

CONTACT US: 01264 243 116




TECHNICAL

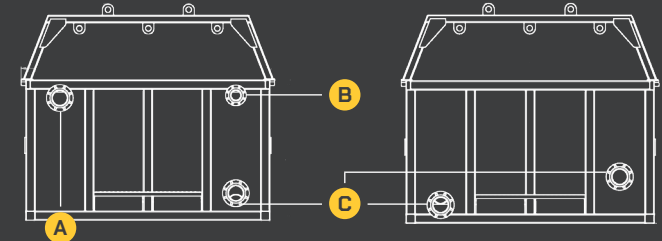

| | Front | Rear |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Connections | <ul style="list-style-type: none"> A Fill up to 6 inch (150mm) B Fill up to 4 inch (100mm) C Sump discharge up to 6 inch (150mm) | Sump discharge up to 6 inch (150mm) |
| | Valve + Coupling connections tailored to meet your site-specific requirements | |
| Access Platform | Integral built in step to enable visibility of tank contents | |
| Draining | Internal sloped floor for efficient draining and cleaning | |
| Internal Coating | Chemical resistant epoxy lining (customer to supply MSDS for tank contents compatibility checking) | |

INTEGRATED PUMP SPECIFICATION

| | |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pump Type | Submersible Pump Mounted on pedestal foot 4" PN16 Outlet - 80mm passage for solids 100 M3/hour @ 8Mtr Head 80 M3/hour @ 10Mtr Head 160 M3/hour @ 4Mtr Head |
| Control Panel | Power Supply 415V 32Amp High / low float operation High level alarm High level remote inhibit |

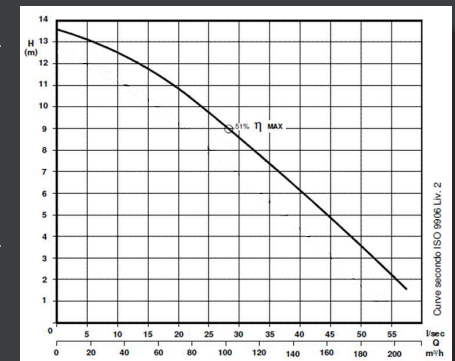

enquiries@terratank.co.uk