



MEASUREMENTS & WEIGHT

Volume	10,000 Litre 10m3 2,200 Gallons (UK)
Height	1,500mm
Width	2,600mm
Length	3,700mm
Weight	2500kg (approx.) empty



MOBILISATION


Hiab or forklift offload

Liftable by crane using low level lifting points

APPLICATIONS

HP jetting	Chemical decom	Shutdowns & turnarounds
Pipeline testing	Industrial services	Centrate storage

TECHNICAL

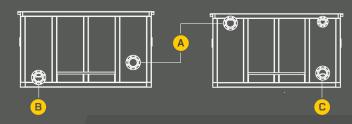

	Front	Rear	
Connections A	Fill Pipe up to 6 inch (150mm) valve & coupling tailored to requirement	Fill Pipe up to 6 inch (150mm) valve & coupling tailored to requirement	
©	Discharge up to 6 inch (150mm) valve & coupling tailored to requirement	Discharge up to 6 inch (150mm) valve 8 coupling tailored to requirement	
Contents Gauging	Sight tube/Calibrated float gauge/Radar (Telemetric)		
Draining	Internal sloped floor for efficient draining and cleaning		
Access Platform	Integral access platform c/w built in step to enable visibility of tank contents		
Internal Coating	Chemical resistant epoxy lining (customer to supply MSDS for tank contents compatibility checking)		