

TT60-W WEIR TANK



MEASUREMENTS & WEIGHT

Length	12,800mm including platform	Volume	60,000 Litres
Width	2,600mm		60m ³
Height	3,100mm		13,200 UK Gallons
Weight (empty)	11000kg [approx.]	Weight (loaded)	78200kg [approx.] - based on a liquid of SG1.12
Ground Pressure	195 kPa [approx.] - based on a liquid of SG1.12		

MOBILISATION


Roll-On-Off self-offload
Hiab self-offload
Crane lift via easy access, low level lifting points

APPLICATIONS

Sewage treatment	Wastewater treatment
Flow regulation	Oil-water separation
Construction	Suspended solids removal



TECHNICAL

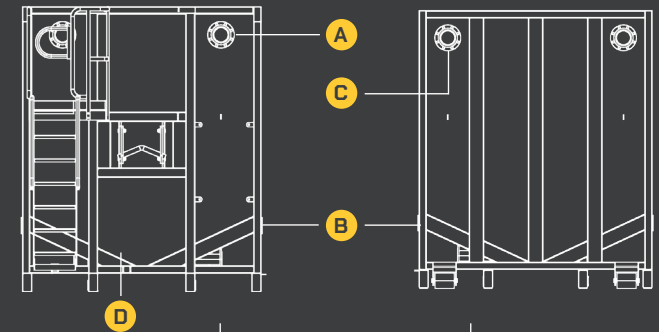

	Front	Rear	Rear
Connections	<p>A High level 6 inch (150mm) connection</p> <p>D Sampling take off point 1 inch (25mm)</p>	<p>B 3 No. 6 inch (150mm) low level sludge removal connections</p>	<p>C Sump discharge 6 inch (300mm) connection</p>
	Valve + Coupling connections tailored to meet your site-specific requirements		
Top Access Platform	Fold out access platform c/w steps, handrails, safety swing gate		
Contents Gauging	Sight tube Radar (Telemetric)		
Floor Design	V-shape bottom for efficient discharge and ease of cleaning		
Manway Access	Low level, quick release, easy access hinged manlid		
Internal Coating	Chemical resistant epoxy lining (customer to supply MSDS for tank contents compatibility checking)		

* specifications are indicative and may vary depending on product configuration and regional requirements.